

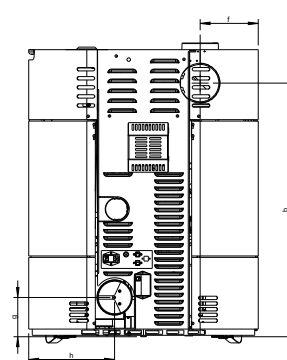
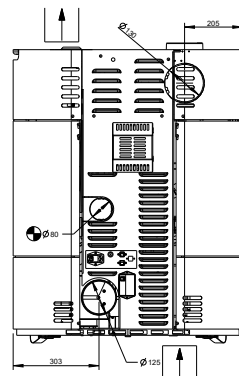






CLOU DUO



AUSTROFLAMM



Pellet operation

Dimensions and weight	
Height [mm]	1013
Width [mm]	810
Depth [mm]	430
Combustion chamber width [mm]	334
Combustion chamber height [mm]	358
Combustion chamber depth [mm]	196
Flue pipe outlet, diameter [mm]	130
Outside air connection diameter [Ø mm]	125
Weight, basic appliance [kg]	212
Weight Xtra [kg]	-
Weight, HMS [kg]	-
Total weight inc. steel case (STM) [kg]	212
Total weight inc. ceramic case (KGM) [kg]	-
Total weight inc. soapstone case (SPM) [kg]	-
b: Height of flue pipe connection, centre rear (as per diagram) [mm]	895
f: Flue pipe connection from right (as per diagram) [mm]	205
g: Height of external air connection, centre (as per diagram) [mm]	138
h: External air connection from left (as per diagram) [mm]	303
dP Radiation front [mm]	750
dS1 Distance left [mm]	150
dR Distance rear [mm]	100
dS2 Distance right [mm]	150
dB Distance bottom [mm]	0
Minimum distance from non-flammable materials [mm]	50
Output	
Nominal heat efficiency [kW]	7.0
Minimum heat output [kW]	2.3
Maximum heat output [kW]	7.0
Minimum room heating capacity [m³]	82
Maximum room heating capacity [m³]	210
Pellet hopper capacity [kg/l]	22 / 34
Minimum fuel throughput [kg/h]	0.6
Maximum fuel throughput [kg/h]	1.66
Burning time, minimum [h]	13
Burning time, maximum [h]	36
Power connection [V/Hz]	230 / 50
Data for the chimney sweep	
Exhaust gas mass flow [g/s]	4.8
Flue gas temperature [°C]	226
Minimum delivery pressure at nominal heat output [Pa]	12
Minimum delivery pressure for chimney calculation [Pa]	12
Equipment	
Room temperature sensor	standard
Weekly timer	standard
Automatic drop grate	standard
Ash removal	Riddling grate // ash pan
Balanced flue - DiBt (German Institute for Structural Engineering)	submitted
WLAN module	Accessories
Remote control	Accessories
Air distribution module	Accessories

- not available

Firewood operation

Dimensions and weight	
Height [mm]	1013
Width [mm]	810
Depth [mm]	430
Combustion chamber width [mm]	334
Combustion chamber height [mm]	358
Combustion chamber depth [mm]	496
Baking compartment width [mm]	-
Baking compartment height [mm]	-
Baking compartment depth [mm]	-
Warming drawer, width [mm]	-
Warming compartment height [mm]	-
Warming drawer, depth [mm]	-
Dimensions, a (with Austroflamm elbow piece) [mm]	-
Dimensions, b (with Austroflamm elbow piece) [mm]	-
Dimensions, c (with Austroflamm elbow piece) [mm]	-
Dimensions, d (with Austroflamm elbow piece) [mm]	-
Flue pipe outlet, diameter [mm]	130
Outside air connection diameter [Ø mm]	125
Weight, basic appliance [kg]	212
Weight Xtra [kg]	-
Weight, HMS [kg]	-
Total weight inc. steel case (STM) [kg]	212
Total weight inc. ceramic case (KGM) [kg]	-
Total weight inc. soapstone case (SPM) [kg]	-
dP Radiation front [mm]	750
dS1 Distance left [mm]	150
dR Distance rear [mm]	100
dS2 Distance right [mm]	150
dB Distance bottom [mm]	0
Minimum distance from non-flammable materials [mm]	50
Output	
Nominal heat efficiency [kW]	6.8
Minimum heat output [kW]	-
Maximum heat output [kW]	6.8
Minimum room heating capacity [m³]	82
Maximum room heating capacity [m³]	210
Energy efficiency class	A+
Data for the chimney sweep	
Exhaust gas mass flow [g/s]	5.6
Flue gas temperature [°C]	209
Minimum delivery pressure at nominal heat output [Pa]	12
at 0.8 times nominal heat output [Pa]	10
Equipment	
Xtra heat storage technology	-
Heat Memory System	-
External air connection / operation independent of ambient air	Yes
Ash removal	Riddling grate // ash pan

- not available