


CLOU COMPACT COOK



www.austroflamm.com

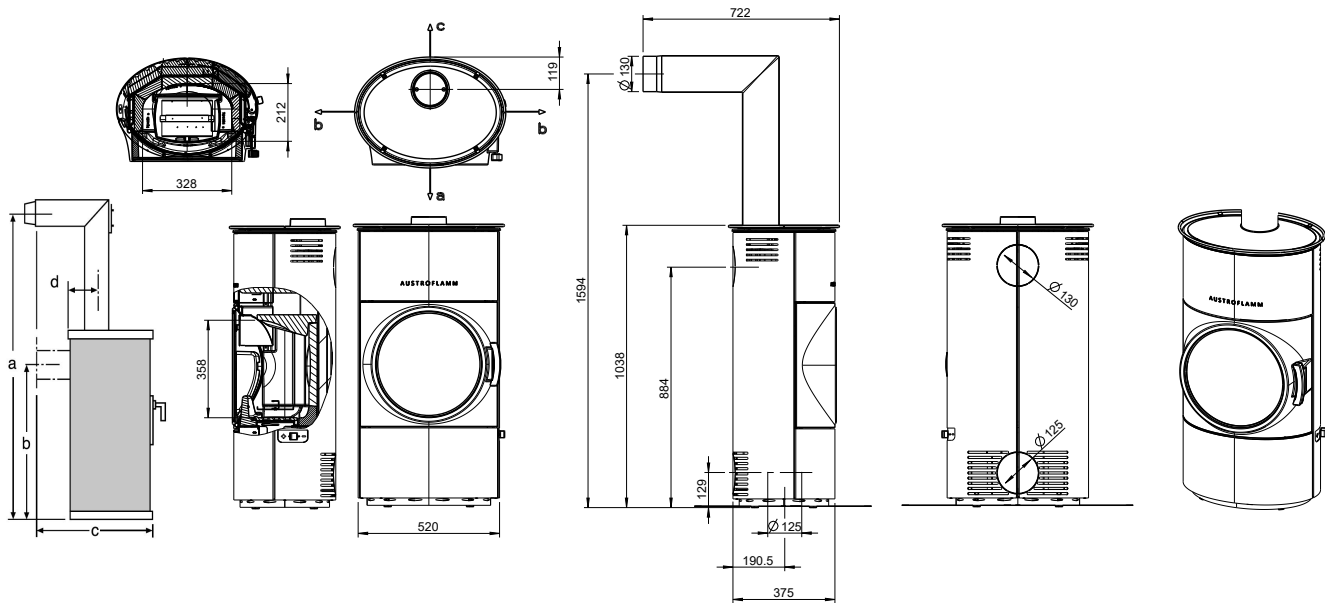

DIMENSIONS AND WEIGHTS		Basic appliance
Steel case (STM) h x w x d [mm]		1038 x 520 x 375
Ceramic case (KMG) h x w x d [mm]		-
Soapstone case (SPM) h x w x d [mm]		-
Firebox h x w x d [mm]		358 x 328 x 212
Weight STM / KMG / SPM [kg]		120 / - / -
Weight HMS [kg]		-
Flue pipe outlet [Ø mm]		130
Flue pipe connection, middle [mm]		884
Dimensions a, b, c, d [mm]		1594 / 884 / 722 / 119
OUTPUT		
Nominal heat output as per EN 13240 [kW]		under examination
Heat output min. / max. [kW]		
Room heating capacity (depending on the building insulation) [m³]		
Energy efficiency category		
FITTINGS		
XTRA heat storage technology		-
Heat Memory System (HMS)		-
Ash box		o
external air connection / balanced flue operation		rear or bottom
DATA FOR THE CHIMNEY SWEEP		
Flue gas mass flow closed [g/s]		under examination
Flue gas temperature closed [°C]		
Minimum delivery pressure at nominal heat output closed [Pa]		
at 0.8 times nominal heat output [Pa]		
Safety distances to combustible materials front / side / rear [mm]		