
## **HEIDI BACK 2.0**





## **HEIDI BACK 2.0**



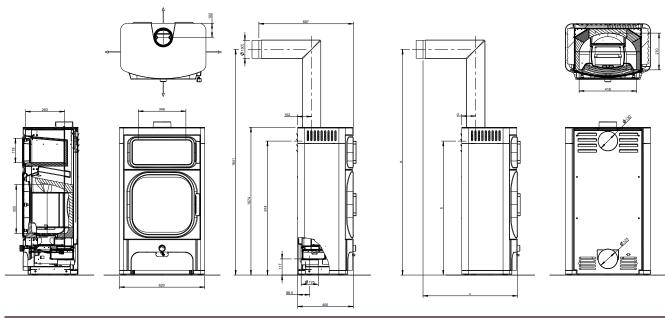

DIMENSIONS AND WEIGHTS	
Steel casing (STM) h x w x d [mm]	1074 x 620 x 405
Ceramic casing (KMG) h x w x d [mm]	-
Soapstone casing (SPM) h x w x d [mm]	-
Firebox h x w x d [mm]	355 x 418 x 270
Weight STM [kg]	167,5
Weight HMS [kg]	68,5
Flue pipe outlet [mm]	130
Flue pipe connection, middle [mm]	974
Baking compartment h x w x d [mm]	178 x 346 x 283
Dimensions a, b, c, d [mm]	1641 / 974 / 687 / 102
Safety distances to combustible materials front / side / rear [mm]	1300 / 200 / 200

HEAT OUTPUT	
Nominal heat output under EN 13240 [kW]	7
Min. / max. heat output [kW]	3.5 / 9
Space heating capacity (depending on the building insulation)[m³]	81-210
Energy efficiency category	A+

FITTINGS	
XTRA heat storage technology	-
Heat Memory System (HMS)	Z
Ash box	0
external air connection / balanced flue operation	rear or bottom

DATA FOR THE CHIMNEY SWEEP	
Total flue gas flow, closed [g/s]	6.41
Flue gas temperature, closed [°C]	262
Minimum feed pressure at nominal heat efficiency, closed [Pa]	10
at 0.8 times nominal heat efficiency [Pa]	8