


JINI XTRA



AUSTROFLAMM



[www.austroflamm.com](http://www.austroflamm.com)

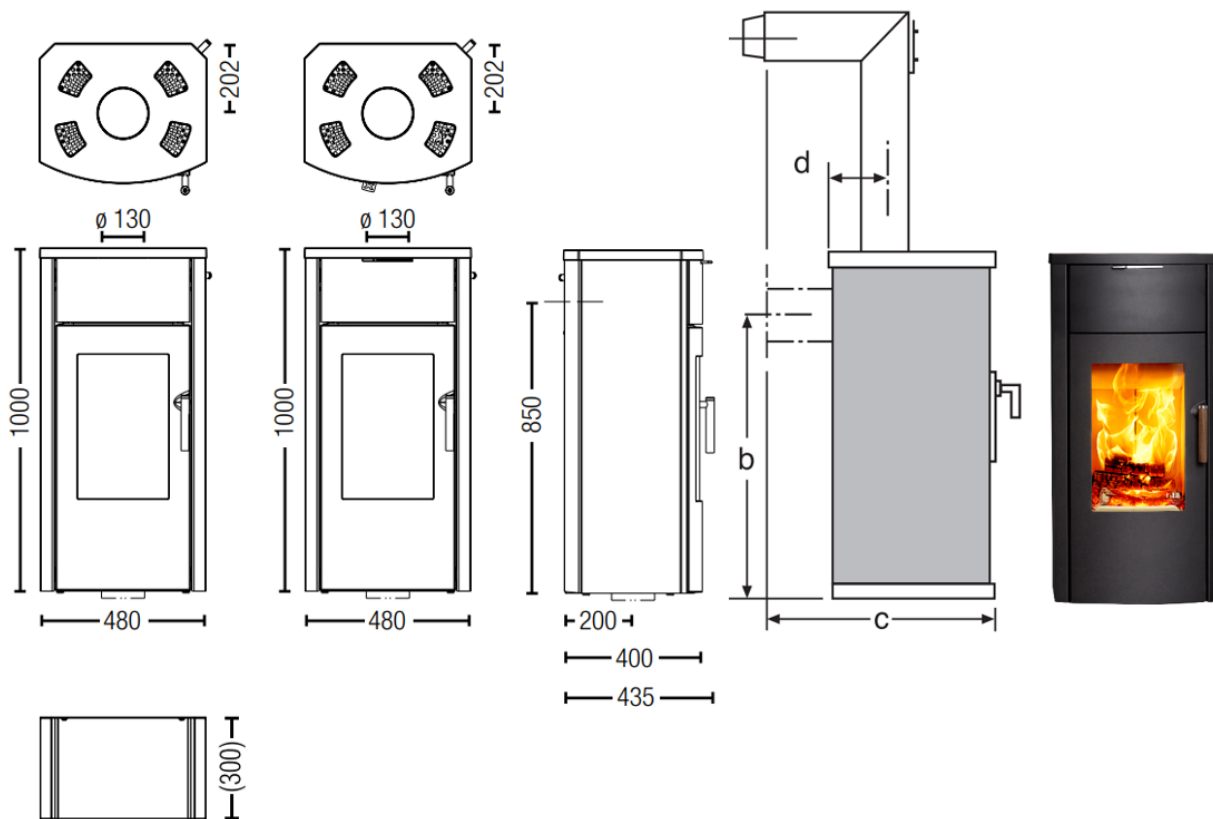

## DIMENSIONS AND WEIGHTS

Steel casing (STM) h x w x d [mm]	1000 x 480 x 400
Ceramic casing (KMG) h x w x d [mm]	-
Soapstone casing (SPM) h x w x d [mm]	1000 x 480 x 400
Firebox h x w x d [mm]	379 x 282 x 224
Weight STM / KMG / SPM [kg]	226 / - / 170
Weight Xtra [kg]	101
Flue pipe outlet [mm]	130
Flue pipe connection, middle [mm]	850
Dimensions a, b, c, d [mm]	1518 / 850 / 583 / 202
Safety distances to combustible materials front / side / rear [mm]	1000 / 270 / 160

## HEAT OUTPUT

Nominal heat output under EN 13240 [kW]	4
Min. / max. heat output [kW]	2.5 / 6
Space heating capacity (depending on the building insulation)[m³]	34-88
Energy efficiency category	A+

## FITTINGS

XTRA heat storage technology	o
Heat Memory System (HMS)	-
Ash pan	o
external air connection / balanced flue operation	below

## DATA FOR THE CHIMNEY SWEEP

Exhaust gas mass flow closed [g/s]	3.9
Flue gas temperature closed [°C]	343
Minimum delivery pressure at nominal heat output closed [Pa]	12
at 0.8 times nominal heat output [Pa]	10