

VUUR-DRIE-60







AUSTROFLAMM



www.austroflamm.com

VUUR-DRIE-60

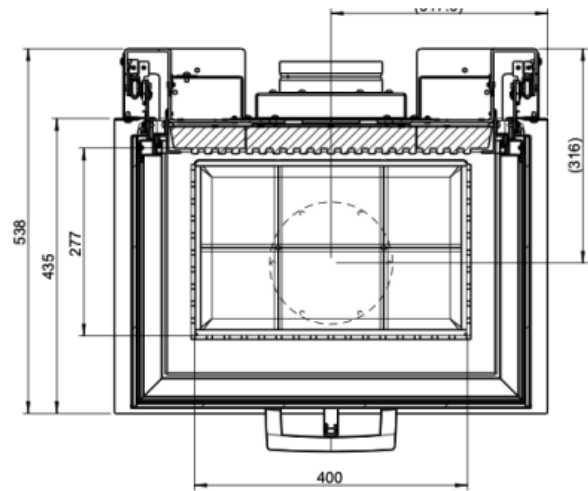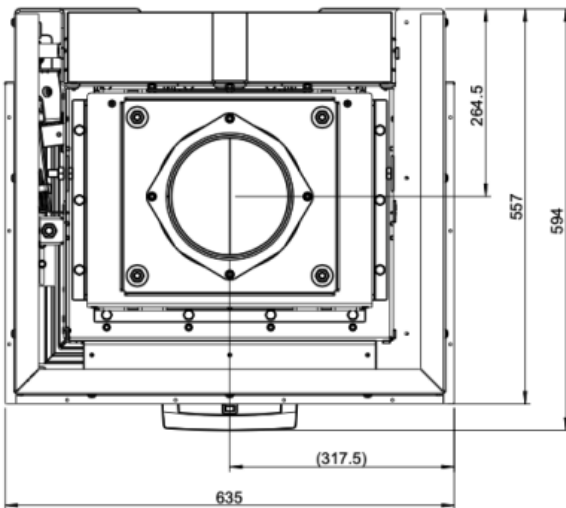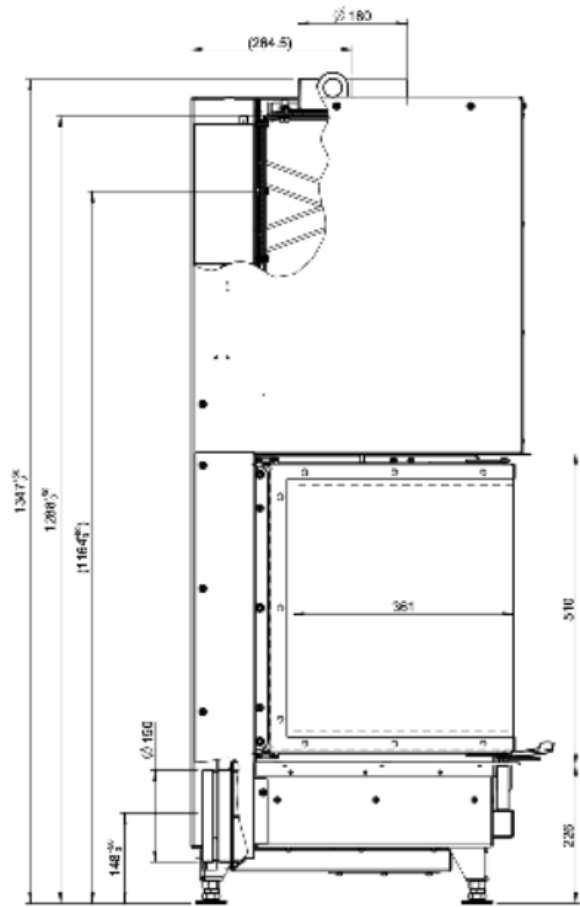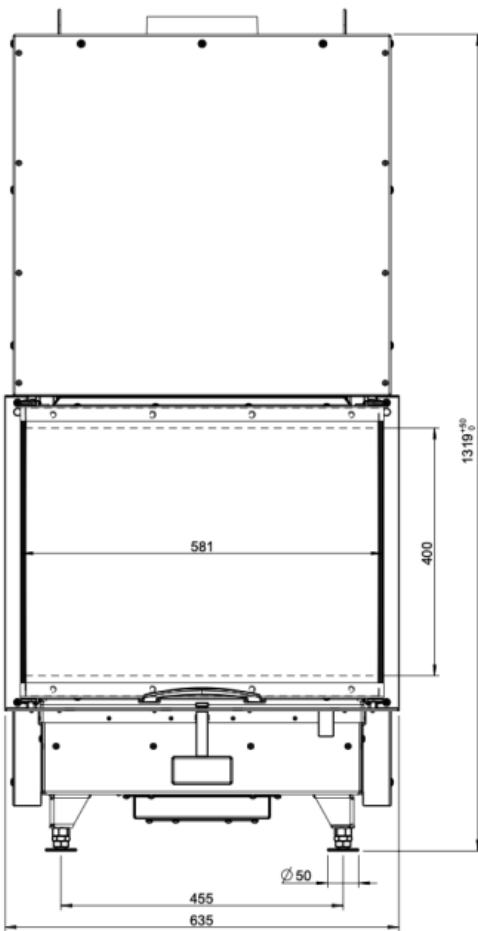

DIMENSIONS AND WEIGHTS

Height [mm]	1347-1397
Width [mm]	635
Depth [mm]	557
Weight [kg]	230
Width (body installation dimension) [mm]	635
Door frame, height [mm]	510
Flue pipe outlet, diameter [mm]	180
Insulation layer thicknesses to the installation floor [mm] (Promasil 950 KS)	0
Insulation layer thicknesses lateral / rear [mm] (Promasil 950 KS)	0/60
Insulation layer thicknesses to the ceiling [mm] (Promasil 950 KS)	0
Ceramic flues - max. length [m]	-

HEAT OUTPUT

Nominal heat efficiency [kW] lt. EN test EN 13229	12
Heat output, minimum [kW] / Maximum heat output [kW]	6-16
Energy efficiency category	A+
Combustion air requirement [m ³ /h]	30.6
Circulating air cross-section without / with metal secondary heating surface [cm ²]	700/-
Hypocausts according to technical regulations	yes

FEATURES

Sliding door	yes
--------------	-----

DATA FOR THE CHIMNEY SWEEP

Total flue gas flow [g/s]	11.4
Flue gas temperature [°C]	276
Minimum feed pressure at nominal heat efficiency [Pa]	12